

FORM PTO-1390 (Modified)
(REV. 1-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES

11345.021001

DESIGNATED/ELECTED OFFICE (DO/EO/US)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

CONCERNING A FILING UNDER 35 U.S.C. 371

09/622246

INTERNATIONAL APPLICATION NO

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/IB99/00288

8 February 1999 (08.02.99)

16 February 1998 (16.02.98)

TITLE OF INVENTION

PROCESSING OF DIGITAL PICTURE DATA IN A DECODER

APPLICANT(S) FOR DO/EO/US

HAMERY, Dominique

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210).
8. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☒ Certificate of Mailing by Express Mail
20. ☒ Other items or information:

Copy of the PCT written Opinion dated December 30, 1999 (30.12.1999), 6 pages
Acknowledgement postcard

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR <div style="font-size: 1.5em; font-weight: bold;">09/622246</div>		INTERNATIONAL APPLICATION NO. <div style="font-weight: bold;">PCT/IB99/00288</div>		ATTORNEY'S DOCKET NUMBER <div style="font-weight: bold;">11345.021001</div>	
---	--	---	--	--	--

21. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : <ul style="list-style-type: none"> <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$970.00 <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$840.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$690.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$670.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$96.00 <div style="text-align: center; font-weight: bold;">ENTER APPROPRIATE BASIC FEE AMOUNT =</div>				CALCULATIONS PTO USE ONLY	
				\$840.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	16 - 20 =	0	x \$18.00	\$0.00	
Independent claims	2 - 3 =	0	x \$78.00	\$0.00	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$840.00	
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). <input type="checkbox"/>				\$0.00	
SUBTOTAL =				\$840.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00	
TOTAL NATIONAL FEE =				\$840.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input checked="" type="checkbox"/>				\$40.00	
TOTAL FEES ENCLOSED =				\$880.00	
				Amount to be: refunded \$	
				charged \$	

☒ A check in the amount of **\$880.00** to cover the above fees is enclosed.

☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **50-0591** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Jonathan P. Osha
 Registration No. 33,986
 ROSENTHAL & OSHA L.L.P.
 700 Louisiana Street, Suite 4550
 Houston, Texas 77002

 Telephone (713) 228-8600
 Facsimile (713) 228-8778

EL521607452US

SIGNATURE
 NAME
33,986
 REGISTRATION NUMBER
August 15, 2000
 DATE

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Dominique HAMERY

Art Unit:

Serial No.:

Examiner:

Filed:

Title: PROCESSING OF DIGITAL PICTURE DATA IN A DECODER

Box PCT Patent Application
Assistant Commissioner for Patents
Washington, DC 20231

PRELIMINARY AMENDMENT

Dear Sir:

Before examining the referenced application on the merits, please amend the
application as outlined below:

In the Claims:

In claim 3, line 1, please delete "or 2".

In claim 5, line 1, please delete "any preceding claim" and replace with -- claim 1--.

In claim 7, line 1, please delete "any preceding claim" and replace with -- claim 1--.

In claim 8, line 1, please delete "any preceding claim" and replace with -- claim 1--.

In claim 9, line 1, please delete "any preceding claim" and replace with -- claim 1--.

In claim 12, line 1, please delete "any preceding claim" and replace with -- claim 1--.

In claim 13, line 1, please delete "any preceding claim" and replace with -- claim 1--.

In claim 14, line 1, please delete "any preceding claim" and replace with -- claim 1--.

In claim 15, line 1, please delete "any preceding claim" and replace with -- claim 1--.

Please cancel claims 17 and 18.




REMARKS

The claims have been amended to remove multiple dependencies and to correct antecedent basis errors. Full examination and favorable action are requested.

Please charge any fees, or make any credits, to Deposit Account No. 500-591,
Reference No. 11345.021001

Date: _____

08/15/00



Jonathan P. Osha
Reg. No. 33,986

Rosenthal & Osha L.L.P.
700 Louisiana Street, Suite 4550
Houston, TX 77002

Telephone: 713/228-8600
Facsimile: 713/6228-8778

11345.021001.20000808.01.doc

PROCESSING OF DIGITAL PICTURE DATA IN A DECODER

The present invention relates to a decoder for a digital audiovisual transmission system, the decoder comprising a processor means for decompressing and displaying
5 compressed digital picture data and a memory means.

Broadcast transmission of digital data is well-known in the field of pay TV systems, where scrambled audiovisual information is sent, usually by a satellite or satellite/cable link, to a number of subscribers, each subscriber possessing a decoder capable of
10 descrambling the transmitted program for subsequent viewing. Terrestrial digital broadcast systems are also known. Recent systems have used the broadcast link to transmit other data, in addition to or as well as audiovisual data, such as computer programs or interactive applications.

15 In the most basic level of functionality of such systems, digital audio and video data relating to the televised program is transmitted in a compressed format, for example, in accordance with the MPEG-2 compression standard. The decoder receives and decompresses this data in order to regenerate the televised program.

20 In addition to simple televised program data, it is becoming increasingly common for the decoder to be required to handle other compressed image or graphic data. For example, in the case where the decoder includes web browser capabilities, the processor of the decoder may be required to receive and decompress downloaded digital picture data, for example, still video pictures, graphic icons etc. This picture
25 information may be displayed over the normal televised program images.

Such still or moving picture data may be typically received in one of any number of compressed formats that are currently used in the context of PC based web browsers. For example, a picture may be formatted and compressed according to the well-known
30 GIF or PNG standards, where an image is described by a colour look-up table defining a table of colours and a matrix of pixel values referring to this table, the matrix data being compressed according to a known compression procedure to prepare the

GIF/PNG picture. Alternatively, the picture may be formatted and compressed as a still MPEG or JPEG image, in which each pixel is directly associated with a red/green/blue colour value.

- 5 It is an object of the present invention to provide a means of efficiently handling such downloaded still picture files.

According to the present invention, there is provided a decoder for a digital audiovisual transmission system, the decoder including a processor for decompressing and displaying compressed still picture data and a memory, characterised in that the
10 memory comprises a storage memory allocated to receive from the processor decompressed data representing a plurality of still picture images, and at least one display memory adapted to hold data representing multiple still picture images readable by the processor prior to display, the data representing the plurality of still
15 picture images being copied from the storage memory to the display memory for subsequent display.

This division of the memory into a storage and display memory areas introduces a degree of flexibility into the display of still image data, in particular by permitting
20 data representing a given still picture image to be held at the same time in both the storage and display means. Data representing one or more still pictures may be held indefinitely in the storage memory as long as there is a possible requirement for this data, even after the picture has been removed from the screen by deletion of the data from the display memory.

25 In some instances, decompressed image data may simply be copied "as is" into the display memory. However, in some cases, the digital image data copied from the storage memory into the display memory is modified or duplicated during the copying step, for example, in order to resize the digital image or to copy the same image a
30 number of times into the display memory.

Preferably, the processor means is adapted to process image data in the display

-3-

memory as one layer amongst a plurality of layers superimposed one over the other when displayed.

As discussed above, picture data may be superimposed in a higher layer over, for example, audiovisual information representing normal televised images. However, in one embodiment, the image data in the display memory may be displayed in a layer normally used by the processor means to display broadcast audiovisual information. This may be the case, for example, where the decoder switches from a "television" mode, in which a broadcast emission is displayed, to a "web browser" mode, in which downloaded picture data from the internet is displayed in place of normal televised programmes.

Advantageously, the memory comprises a second display memory readable by the graphic processor means and corresponding to a second layer of displayed image data, data being copied from the storage memory to the second display memory for subsequent display in the second layer of image data.

Again, as before, the digital image data copied from the storage memory to the second display memory may be modified during the copying step.

In one embodiment, for example, where the decoder switches between a television and browser mode, the image data in the second display memory may be displayed in the lowermost background layer normally used by the processor means to display broadcast still audiovisual information.

Preferably, partial image data is copied from the storage memory to a display memory under the control of an application running within the decoder so as to permit display of part of an image. This may be desirable, for example, where the decompression and downloading of an image into the storage memory by the processor proceeds in a number of stages.

In one embodiment, image data is copied from the storage memory into a first or

second display memory under control of a high level application running in the processor. Alternatively, this process may be handled automatically by a lower level application associated for example with the general handling of received image data.

- 5 Compressed digital picture data is preferably stored in a buffer memory prior to decompression by the processor. It is not necessary that this buffer means be a single integral block of memory particularly if the data arrives in a number of blocks of information. In particular, in one embodiment, the buffer comprises a plurality of buffer memory elements. Each memory element may correspond, for example to a
10 block of data downloaded in the decoder.

- Preferably, the decompression and transfer of image data from the buffer memory elements to the storage memory, and from the storage memory to a display memory, is controlled by the processor such that image information present in the storage
15 memory is transferred to the display memory at the end of the decompression of the contents of each buffer element.

- It may be the case, for example, that information corresponding to one image will be spread over a number of buffer elements. As each buffer is emptied and
20 decompressed, the information ready for display is transferred immediately to the display memory, enabling a partial display of the complete image.

- In addition, or alternatively, the decompression and transfer of a group of images in a single image file from the buffer memory to the storage memory, and from the
25 storage memory to a display memory, is controlled by the processor such that image information is transferred from the storage memory to the display memory at the end of the decompression of each image in the image file.

- As discussed above, image data may be sent in any number of formats. In one
30 embodiment, the processor is adapted to decompress picture data sent in a compression standard, such as GIF or PNG, that uses a colour look-up table.

-5-

In addition or alternatively, the processor is adapted to decompress picture data sent in a compression standard, such MPEG or JPEG, that uses a red/blue/green colour value associated with each pixel.

5 All functions of decompression, display etc. may be integrated in a single processor. Alternatively, the processor in the decoder need not necessarily be embodied in a single chip but may be divided, for example, into a general processor handling data decompression and a graphic processor for preparing the decompressed data for display.

10

Similarly, whilst the application may refer to a storage memory, a display memory etc. it is to be understood that these need not correspond to physically separate memory devices (RAM, ROM, FLASH, etc.) but may correspond to one or more areas allocated for this purpose by a controlling application and divided between one or
15 more physical memory devices.

15

The present invention has been discussed above in relation to a decoder apparatus. The present invention equally extends to a method of digital image processing within a decoder, corresponding to the general and preferred aspects of the invention
20 discussed above.

20

In the context of the present application the term "digital audiovisual transmission system" refers to all transmission systems for transmitting or broadcasting primarily audiovisual or multimedia digital data. Whilst the present invention is particularly
25 applicable to a broadcast digital television system, the present invention may equally be used in filtering data sent by a fixed telecommunications network for multimedia internet applications etc.

25

Similarly, the term "decoder" is used to apply to an integrated receiver/decoder for
30 receiving and decrypting an encrypted transmission, the receiver and decoder elements of such a system as considered separately, as well as to a receiver capable of receiving non-encrypted broadcasts. The term equally covers decoders including additional

30

functions, such as web browsers, together with decoders integrated with other devices, for example, integrated VHS/decoder devices, digital televisions, or the like.

The term MPEG refers to the data transmission standards developed by the International Standards Organisation working group "Motion Pictures Expert Group" and notably the MPEG-2 standard developed for digital television applications and set out in the documents ISO 13818-1, ISO 13818-2, ISO 13818-3, and ISO 13818-4. In the context of the present patent application, the term includes all variants, modifications or developments of the basic MPEG formats applicable to the field of digital data transmission.

There will now be described, by way of example only, a preferred embodiment of the present invention, with reference to the attached figures, in which:

Figure 1 shows an overview of a digital television system;

Figure 2 shows the elements of the receiver/decoder of Figure 1;

Figure 3 shows a block diagram of the computer system of the receiver/decoder;

Figure 4 shows in layer form the image data processed by the graphic processor of Figure 2;

Figure 5 shows the operations carried out in memory for picture data to be displayed in the MPEG layer of Figure 4; and

Figure 6 shows the operations carried out in memory for the partial display of picture data in the MPEG layer.

An overview of a digital television system 1 according to the present invention is shown in Figure 1. The invention includes a mostly conventional digital television system 2 that uses the known MPEG-2 compression system to transmit compressed

-7-

digital signals. In more detail, MPEG-2 compressor 3 in a broadcast centre receives a digital signal stream (typically a stream of video signals). The compressor 3 is connected to a multiplexer and scrambler 4 by linkage 5.

5 The multiplexer 4 receives a plurality of further input signals, assembles the transport stream and transmits compressed digital signals to a transmitter 6 of the broadcast centre via linkage 7, which can of course take a wide variety of forms including telecommunications links. The transmitter 6 transmits electromagnetic signals via uplink 8 towards a satellite transponder 9, where they are electronically processed and
10 broadcast via notional downlink 10 to earth receiver 12, conventionally in the form of a dish owned or rented by the end user. The signals received by receiver 12 are transmitted to an integrated receiver/decoder 13 owned or rented by the end user and connected to the end user's television set 14. The receiver/decoder 13 decodes the compressed MPEG-2 signal into a television signal for the television set 14.

15 Other transport channels for transmission of the data are of course possible, such as terrestrial broadcast, cable transmission, combined satellite/cable links, telephone networks etc.

20 In a multichannel system, the multiplexer 4 handles audio and video information received from a number of parallel sources and interacts with the transmitter 6 to broadcast the information along a corresponding number of channels. In addition to audiovisual information, messages or applications or any other sort of digital data may be introduced in some or all of these channels interlaced with the transmitted digital
25 audio and video information.

A conditional access system 15 is connected to the multiplexer 4 and the receiver/decoder 13, and is located partly in the broadcast centre and partly in the decoder. It enables the end user to access digital television broadcasts from one or
30 more broadcast suppliers. A smartcard, capable of deciphering messages relating to commercial offers (that is, one or several television programmes sold by the broadcast supplier), can be inserted into the receiver/decoder 13. Using the decoder 13 and

smartcard, the end user may purchase commercial offers in either a subscription mode or a pay-per-view mode.

As mentioned above, programmes transmitted by the system are scrambled at the multiplexer 4, the conditions and encryption keys applied to a given transmission being determined by the access control system 15. Transmission of scrambled data in this way is well known in the field of pay TV systems. Typically, scrambled data is transmitted together with a control word for descrambling of the data, the control word itself being encrypted by a so-called exploitation key and transmitted in encrypted form.

The scrambled data and encrypted control word are then received by the decoder 13 having access to an equivalent of the exploitation key stored on a smart card inserted in the decoder to decrypt the encrypted control word and thereafter descramble the transmitted data. A paid-up subscriber will receive, for example, in a broadcast monthly ECM (Entitlement Control Message) the exploitation key necessary to decrypt the encrypted control word so as to permit viewing of the transmission.

An interactive system 16, also connected to the multiplexer 4 and the receiver/decoder 13 and again located partly in the broadcast centre and partly in the decoder, enables the end user to interact with various applications via a modem back channel 17. The modem back channel may also be used for communications used in the conditional access system 15. An interactive system may be used, for example, to enable the viewer to communicate immediately with the transmission centre to demand authorisation to watch a particular event, download an application etc.

Referring to Figure 2, the elements of the receiver/decoder 13 or set-top box adapted to be used in the present invention will now be described. The elements shown in this figure will be described in terms of functional blocks.

The decoder 13 comprises a central processor 20 including associated memory elements and adapted to receive input data from a serial interface 21, a parallel

-9-

interface 22, a modem 23 (connected to the modem back channel 17 of Fig 1), and switch contacts 24 on the front panel of the decoder.

The decoder is additionally adapted to receive inputs from an infra-red remote control 25 via a control unit 26 and also possesses two smartcard readers 27, 28 adapted to read bank or subscription smartcards 29, 30 respectively. The subscription smartcard reader 28 engages with an inserted subscription card 30 and with a conditional access unit 29 to supply the necessary control word to a demultiplexer/descrambler 30 to enable the encrypted broadcast signal to be descrambled. The decoder also includes a conventional tuner 31 and demodulator 32 to receive and demodulate the satellite transmission before being filtered and demultiplexed by the unit 30.

Processing of data within the decoder is generally handled by the central processor 20. The software architecture of the central processor corresponds to a virtual machine interacting via an interface layer with a lower level operating system implemented in the hardware components of the decoder. This will now be described with reference to Figure 3.

For the purposes of this description, an application is a piece of computer code for controlling high level functions of the receiver/decoder 13. For example, when the end user positions the focus of a remote controller on a button object seen on the screen of the television set and presses a validation key, the instruction sequence associated with the button is run.

An interactive application proposes menus and executes commands at the request of the end user and provides data related to the purpose of the application. Applications may be either resident applications, that is, stored in the ROM (or FLASH or other non-volatile memory) of the receiver/decoder 13, or broadcast and downloaded into the RAM or FLASH memory of the receiver/decoder 13.

Applications are stored in memory locations in the receiver/decoder 13 and represented as resource files. The resource files comprise graphic object description unit files,

-10-

variables block unit files, instruction sequence files, application files and data files.

The receiver/decoder contains memory divided into a RAM volume, a FLASH volume and a ROM volume, but this physical organization is distinct from the logical organization. The memory may further be divided into memory volumes associated with the various interfaces. From one point of view, the memory can be regarded as part of the hardware; from another point of view, the memory can be regarded as supporting or containing the whole of the system shown apart from the hardware.

Referring to Figure 3, the computer system can be regarded as centred on a run time engine 40 forming part of a virtual machine 41. This is coupled to applications on one side (the "high level" side), and, on the other side (the "low level" side), via various intermediate logical units discussed below, to the receiver/decoder hardware 42. The receiver/decoder hardware can be regarded as including various ports corresponding to the functional blocks discussed in relation to Figure 2 (the interface 26 for the handset 25, the MPEG stream interface 30, the serial interface 21, the parallel interface 22, the interfaces to the card readers 27, 28, and the interface 23 to the modemmed back channel 17).

Various applications 43 are coupled to the virtual machine 41. Some of the more commonly used applications may be more or less permanently resident in the system, as indicated at 44, while others will be downloaded into the system, eg from the MPEG data stream or from other ports as required.

The virtual machine 41 includes, in addition to the run time engine 40, some resident library functions 45 which include a toolbox 46. The library contains miscellaneous functions in C language used by the engine 40. These include data manipulation such as compression, expansion or comparison of data structures, line drawing, etc. The library 45 also includes information about device drivers 49 in the firmware of the receiver/decoder, such as hardware and software version numbers and available RAM space, and a function used when downloading a new device 47. Functions can be downloaded into the library and stored in FLASH or RAM memory.

-11-

The run time engine 40 is coupled to a device manager 48 which is coupled to a set of devices 47 which are coupled to device drivers 49 which are in turn coupled to the ports or interfaces. In broad terms, a device driver can be regarded as defining a logical interface, so that two different device drivers may be coupled to a common physical port. A device will normally be coupled to more than one device driver; if a device is coupled to a single device driver, the device will normally be designed to incorporate the full functionality required for communication, so that the need for a separate device driver is obviated. Certain devices may communicate among themselves.

As will be described below, there are three forms of communication from the devices 47 up to the run time engine: by means of variables, buffers, and events which are passed to a set of event queues.

Each function of the receiver/decoder is represented as a device 47. Devices can be either local or remote. Local devices include smartcards, SCART connector signals, modems, serial and parallel interfaces, a MPEG video and audio player and an MPEG section and table extractor. Remote devices executed in a remote location, differ from local devices in that a port and procedure must be defined by the system authority or designer, rather than by a device and device driver provided and designated by the receiver/decoder manufacturer.

The run time engine 40 runs under the control of the microprocessor and a common application programming interface. They are installed in every receiver/decoder so that all receiver/decoders are identical from the application point of view.

The engine 40 runs applications 43 on the receiver/decoder. It executes interactive applications and receives events from outside the receiver/decoder, displays graphics and text, calls devices for services and uses functions of the library 45 connected to the engine 40 for specific computation.

The run time engine 40 is an executable code installed in each receiver/decoder, and

-12-

includes an interpreter for interpreting and running applications. The engine is adaptable to any operating system, including a single task operating system (such as MS-DOS). The engine is based on process sequencer units (which take various events such as a key press, to carry out various actions), and contains its own scheduler to manage event queues from the different hardware interfaces. It also handles the display of graphics and text. A process sequencer unit comprises a set of action-groups. Each event causes the process sequencer unit to move from its current action-group to another action-group in dependence on the character of the event, and to execute the actions of the new action-group.

The engine 40 comprises a code loader to load and download applications 43 into the receiver/decoder memory. Only the necessary code is loaded into the RAM or FLASH memory, in order to ensure optimal use. The downloaded data is verified by an authentication mechanism to prevent any modification of an application 43 or the execution of any unauthorized application. The engine 40 further comprises a decompressor. As the application code (a form of intermediate code) is compressed for space saving and fast downloading from the MPEG stream or via a built-in receiver/decoder mode, the code must be decompressed before loading it into the RAM. The engine 40 also comprises an interpreter to interpret the application code to update various variable values and determine status changes, and an error checker.

Before using the services of any device 47, a program (such as an application instruction sequence) has to be declared as a "client", that is, a logical access-way to the device 47 or the device manager 48. The manager gives the client a client number which is referred to in all accesses to the device. A device 47 can have several clients, the number of clients for each device 47 being specified depending on the type of device. A client is introduced to the device 47 by a procedure "Device: Open Channel". This procedure assigns a client number to the client. A client can be taken out of the device manager 48 client list by a procedure "Device: Close Channel".

The access to devices 47 provided by the device manager 48 can be either synchronous or asynchronous. For synchronous access, a procedure "Device: Call" is

-13-

used. This is a means of accessing data which is immediately available or a functionality which does not involve waiting for the desired response. For asynchronous access, a procedure "Device: I/O" is used. This is a means of accessing data which involves waiting for a response, for example scanning tuner frequencies to find a multiplex or getting back a table from the MPEG stream. When the requested result is available, an event is put in the queue of the engine to signal its arrival. A further procedure "Device: Event" provides a means of managing unexpected events.

As noted above, the main loop of the run time engine is coupled to a variety of process sequencer units, and when the main loop encounters an appropriate event, control is temporarily transferred to one of the process sequencer units.

Thus, it can be seen that the computer system implemented in the processor provides a platform having considerable flexibility in enabling an application to communicate with a variety of devices.

Returning to Figure 2, the processing of sound and image data by each of the associated processors will now be described in detail. In the case of received audio and video signals, the MPEG packets containing these signals will be demultiplexed and filtered so as to pass real time audio and video data in the form of a packetised elementary stream (PES) of audio and video data to dedicated audio and video processors or decoders 33, 34. The converted output from the audio processor 33 passes to a preamplifier 35 and thereafter via the audio output of the receiver/decoder. The converted output from the video processor 34 passes via a graphic processor 36 and PAL/SECAM encoder 37 to the video output of the receiver/decoder. The video processor may be of a conventional type, such as the ST 3520 A of SGS Thomson.

The graphic processor 36 additionally receives graphic data for display (such as generated images etc) from the central processor 20 and combines this information with information received from the video processor 34 to generate a screen display combining moving images together with overlaid text or other images. An example

-14-

of a graphic processor adapted to carry out this sort of operation is the CL 9310 of C-CUBE.

In the case of received teletext and/or subtitle data, the conversion of the real time PES data to generate the appropriate images may also be handled by dedicated processors. However, in most conventional systems, this is handled by the general processor 20.

In point of fact, many of functions associated with the elements such as the graphic processor 36, video decoder 34, central processor 20 etc. may be combined or divided out in a number of ways, e.g. to integrate the central and graphic processors to form a single processor means etc.

Referring now to Figure 4, the functionality of the graphic processor 36 will now be described. As discussed above, the graphic processor receives and processes real time video data from the video decoder 34 together with graphic data received from the general processor 20 in order to generate an overlaid screen display.

As shown in Figure 4, the graphic processor 36 is adapted to process input data divided into four distinct layers; a background layer 50, an MPEG layer 51, a graphic layer 52 and a cursor layer 53. As will be understood, the background layer 50 corresponds to the lowest layer of the screen display, the other layers being progressively superimposed with varying degrees of translucency or opacity over this layer.

In the case where the decoder is configured to display a broadcast video signal, the background and MPEG layers 50, 51 correspond to the stream of data received from the video decoder 34, the layer 50 corresponding to MPEG still pictures received from the decoder 34 and the layer 51 corresponding to a moving video MPEG signal received from the decoder. The division of a video signal into a fixed and a changing part is a known characteristic of MPEG compression.

-15-

Other configurations of the decoder are possible, for example, where the background and MPEG layers 50, 51 are completed by picture data in any number of formats received from the processor 20. For example, in the case where the decoder is acting in web browser configuration, the processor 20 may supply still and/or moving picture data to complete the layers 50, 51. The layer 50 may equally correspond, for example, to a background colour and the layer 51 to one or more windows displayed over the background and containing, for example, information, moving icons or the like. The operation of the system in handling picture data will be discussed in more below with reference to Figures 5 and 6.

Still and moving image data from the background and MPEG layers 50, 51 are mixed together by the graphic processor 36, as represented by the element 54, and a combined output provided. Mixing of the MPEG layer information 51 over the background layer 50 by the graphic processor may be carried out using a so-called alpha blending factor to permit a greater or lesser degree of translucency of the pixels in the MPEG layer image. In the case of a moving video image received from the video decoder 34, the same blending factor is used for all pixels within the video sequence. In the case of picture data from the central processor 20, the value of the blending factor for the layer 51 may be different for different parts of the screen.

The graphic layer 52 is used for texts, shapes, icons etc that will be displayed on the screen over the images taken from the layers 50, 51, for example, to permit display of a moving icon or the like generated by the processor 20 over a real-time video sequence taken from the video decoder 34.

In a similar manner to the blending carried out for the layers 50, 51, the element 55 carries out a blending of the graphic layer 52 with the combined output of the layers 50, 51. Different regions within the graphic layer 52 may be assigned a different blending factor and a corresponding different level of translucency depending on the characteristics of the data within each region.

A final layer, the cursor layer, is shown at 53 and represents an opaque cursor image,

-16-

generated by hardware under control of the central processor 20 and superimposed over all the previous layers. As shown at 56, this layer is combined with the summed output from the combination of all previous layers to generate a final combined output 57 sent to the encoder 37 for subsequent display. Unlike the previous layers, the cursor presents a continuously opaque appearance and is superimposed over the combined layers without any blending.

Referring to Figures 5 and 6, the operation of a device 47 of the kind shown in Figure 3 and adapted to decompress and display downloaded picture images in the MPEG layer 51 will now be described. In the following description, the term picture is used to describe a compressed digital image. Typically, the sorts of picture formats used may include MPEG still picture, JPEG format picture, PNG format picture, GIF format picture, etc.

Whilst the following description will concentrate on the processing and display of a single picture, a sequence of still pictures may be displayed one after the other in order to generate a moving image sequence.

Referring to Figure 5, downloaded compressed picture data 60, 61, 62 is initially stored in a buffer section of the RAM memory of the decoder indicated at 63. This buffer memory may be of a type initialised and managed by a high level application 43 responsible for decoding and displaying images, or an area of memory handled by the device manager 48 shown in Figure 3.

Each type of picture file or group of picture files includes a header indicating the picture file format (GIF, MPEG, etc.) as well as the information needed to decompress the picture file. For example, a GIF format file 62 comprising more than one picture has a global header describing the size of the overall area where the two decompressed images will be displayed and a specific header for each picture describing its size and location coordinates within the overall area.

Following downloading of a compressed picture into the buffer section 63 of the

-17-

memory, a decompression of the picture data will be effected by the device in response to a command PICTURE_DECOMPRESS received from the application. The subsequently decompressed image data 63, 64, 65 is stocked in a separate storage section of the RAM memory indicated at 66 and reserved for image data eventually to be displayed in the MPEG layer. Each decompressed image or image sequence is given an image identity reference Id1, Id2, Id3 by the device, this ID value being supplied to the high level application and used for all subsequent operations to be carried out on this data.

Unlike the compressed picture data temporarily held in the application buffer 63, the decompressed image data 63, 64, 65 may be held indefinitely in the storage memory 66 until such time as the application decides to delete the information.

The storage of decompressed image data in a distinct assigned memory area permits the data to be manipulated in a number of ways prior to display. For example, a resizing of the image may be carried out, either by the device itself, the device manager or by a higher level application. Equally, the image may be duplicated in order to be displayed at a number of positions on the screen. Conversion of colour data associated the image, for example to compensate for limitations in the functionality of the graphic processor, may also be carried out on the image.

Modified or unmodified data stored in the memory 66 is passed, in response to a command PICTURE_DISPLAY from the application, into a separate RAM memory section 67 assigned for images to be displayed in the MPEG layer 51 (see Figure 2).

The size of the display memory 67 corresponds to the screen area. As shown, the images Id1 and Id2 are displayed at 68 and 69, whilst the image or sequence of images Id3 is duplicated and displayed at the positions 70, 71. The information in the memory section 67 is fed to the graphic processor 36 in order to create the MPEG layer 51, as shown in Figure 2.

In addition to the transfer of image information between the storage area 66 and display area 67, a second transfer may also be carried out to copy information held in

-18-

the storage area 66 into a memory area (not shown) associated with the display of images in the background layer 40 of Figure 2. For example, a single image may be replicated and displayed a number of times in the background layer in order to cover the screen in a tiling manner. The information stored in the memory area associated with the background layer is accessed by the graphic processor in the same manner as the MPEG display area 67.

As will be understood, the memory sections 63, 64, 65 do not need to physically correspond to uninterrupted memory zones in a single RAM or other memory element. In particular, the memory area 63 may be divided between a number of buffers. Figure 6 shows the steps associated with the decompression of a file 80 containing two compressed pictures 81, 82 previously downloaded into four associated buffer elements or lists of buffers 83, 84, 85, 86.

Each buffer list corresponds to the buffer areas in which a block of data has been downloaded from the MPEG stream. The buffer list itself may designate a number of separate buffer areas depending on availability as the information is downloaded.

At step 87, the application sends a PICTURE_DECOMPRESS command 87 to start the decompression process. The device allocates a group image Id and starts read the buffers. Once the start of a picture is found at step 88, the device assigns an image Id and starts decompression of the image. At step 89, the end of the first buffer list is reached and the application sends a PICTURE_ADD_DATA command at step 90 to command the device to read the next buffer list in the series.

At this point, only part of the image of the first picture 81 has been decompressed and stored in the memory storage area 66. The application may nevertheless decide to immediately transfer the partial image to the display memory area 67.

The decompression of the remaining part of the picture 81 then continues until the start of the next picture is found at 91. At this point, the whole of the first picture 81 has been decompressed and stored in the memory area 66. The application may then

-19-

update the contents of the display memory area 67 by copying the complete image into the display area 67. In this way, the whole of the first picture 81 may be displayed before the second picture has been decompressed.

- 5 At step 92, the device informs the application of the end of the second buffer list 84 and the application sends a second PICTURE_ADD_DATA command 93 to start the reading of the next buffer list 85. The process is repeated at the end of the third buffer list 85 and beginning of the fourth buffer list 86 by the steps 94, 95. Again, each time the end of a buffer is reached at 92, 94, the application may copy the data
10 that has already been decompressed from the storage area 66 into the display area 67.

- At step 96, the end of the file is reached and both the pictures 81, 82 have been decompressed and loaded into the storage memory 66. At this point, the device informs the application of the successful decompression of the whole file and the
15 application again copies the contents of the storage memory 66 into the display memory 67 to display the complete set of pictures.

005499 94222960

CLAIMS

1. A decoder for a digital audiovisual transmission system, the decoder including a
5 processor for decompressing and displaying compressed still picture data and a
memory, characterised in that the memory comprises a storage memory allocated to
receive from the processor decompressed data representing a plurality of still picture
images, and at least one display memory adapted to hold contemporaneously data
representing multiple still picture images readable by the processor prior to display,
10 the data representing the plurality of still picture images being copied from the storage
memory to the display memory for subsequent display.
2. A decoder as claimed in claim 1 in which the digital image data copied from the
storage memory into the display memory is modified or duplicated during the copying
15 step.
3. A decoder as claimed in claim 1 or 2 in which the processor is adapted to process
image data in the display memory as one layer amongst a plurality of layers
superimposed one over the other when displayed.
20
4. A decoder as claimed in claim 3 in which the processor is adapted to display the
image data in the display memory in a layer normally used by the processor means to
display broadcast audiovisual information.
- 25 5. A decoder as claimed in any preceding claim in which the memory comprises a
second display memory readable by the processor means and corresponding to a
second layer of displayed image data, data being copied from the storage memory to
the second display memory for subsequent display in the second layer of image data.
- 30 6. A decoder as claimed in claim 5 in which the digital image data copied from the
storage memory to the second display memory is modified or duplicated during the
copying step.

-21-

7. A decoder as claimed in any preceding claim, in which partial image data is copied from the storage memory to a display memory so as to permit display of part of an image.

5 8. A decoder as claimed in any preceding claim, in which image data is copied from the storage memory into a first or second display memory under control of a high level application running on the processor.

9. A decoder as claimed in any preceding claim, in which compressed digital picture
10 data is stored in a buffer memory means prior to decompression by the processor.

10. A decoder as claimed in claim 9, in which the buffer means comprises a plurality of buffer memory elements.

11. A decoder as claimed in claim 10, in which the decompression and transfer of
15 image data from the buffer memory elements to the storage memory, and from the storage memory to a display memory, is controlled by the processor such that image information present in the storage memory is transferred to the display at the end of the decompression of the contents of each buffer element.

12. A decoder as claimed in any preceding claim, in which the decompression and
20 transfer of a group of images in a single image file from the buffer memory to the storage memory, and from the storage memory to a display memory, is controlled by the processor means such that image information is transferred from the storage
25 memory to the display memory at the end of the decompression of each image in the image file.

13. A decoder as claimed in any preceding claim, in which the processor is adapted
30 to decompress picture data sent in a compression standard that uses a colour look-up table.

14. A decoder as claimed in any preceding claim, in which the processor is adapted

-22-

to decompress picture data sent in a compression standard that uses a red/blue/green colour value associated with each pixel.


15. A decoder as claimed in any preceding claim in which the processor comprises a
5 general processor for decompressing digital picture data and a graphic processor for preparing the decompressed data for display.

16. A method of digital image processing in a decoder for a digital audiovisual
transmission system, the decoder comprising a processor for decompressing and
10 displaying compressed still picture data characterised in that decompressed digital image data representing a plurality of still picture images received from the processor is transmitted to a storage memory and thereafter copied from the storage memory to a display memory which holds contemporaneously data representing said multiple picture images, the data being read by the processor for subsequent display of such
15 multiple picture images.

17. A decoder for a digital audiovisual transmission system substantially as herein described.

20 18. A method of digital image processing in a decoder for a digital audiovisual transmission system substantially as herein described.

Fig.1.

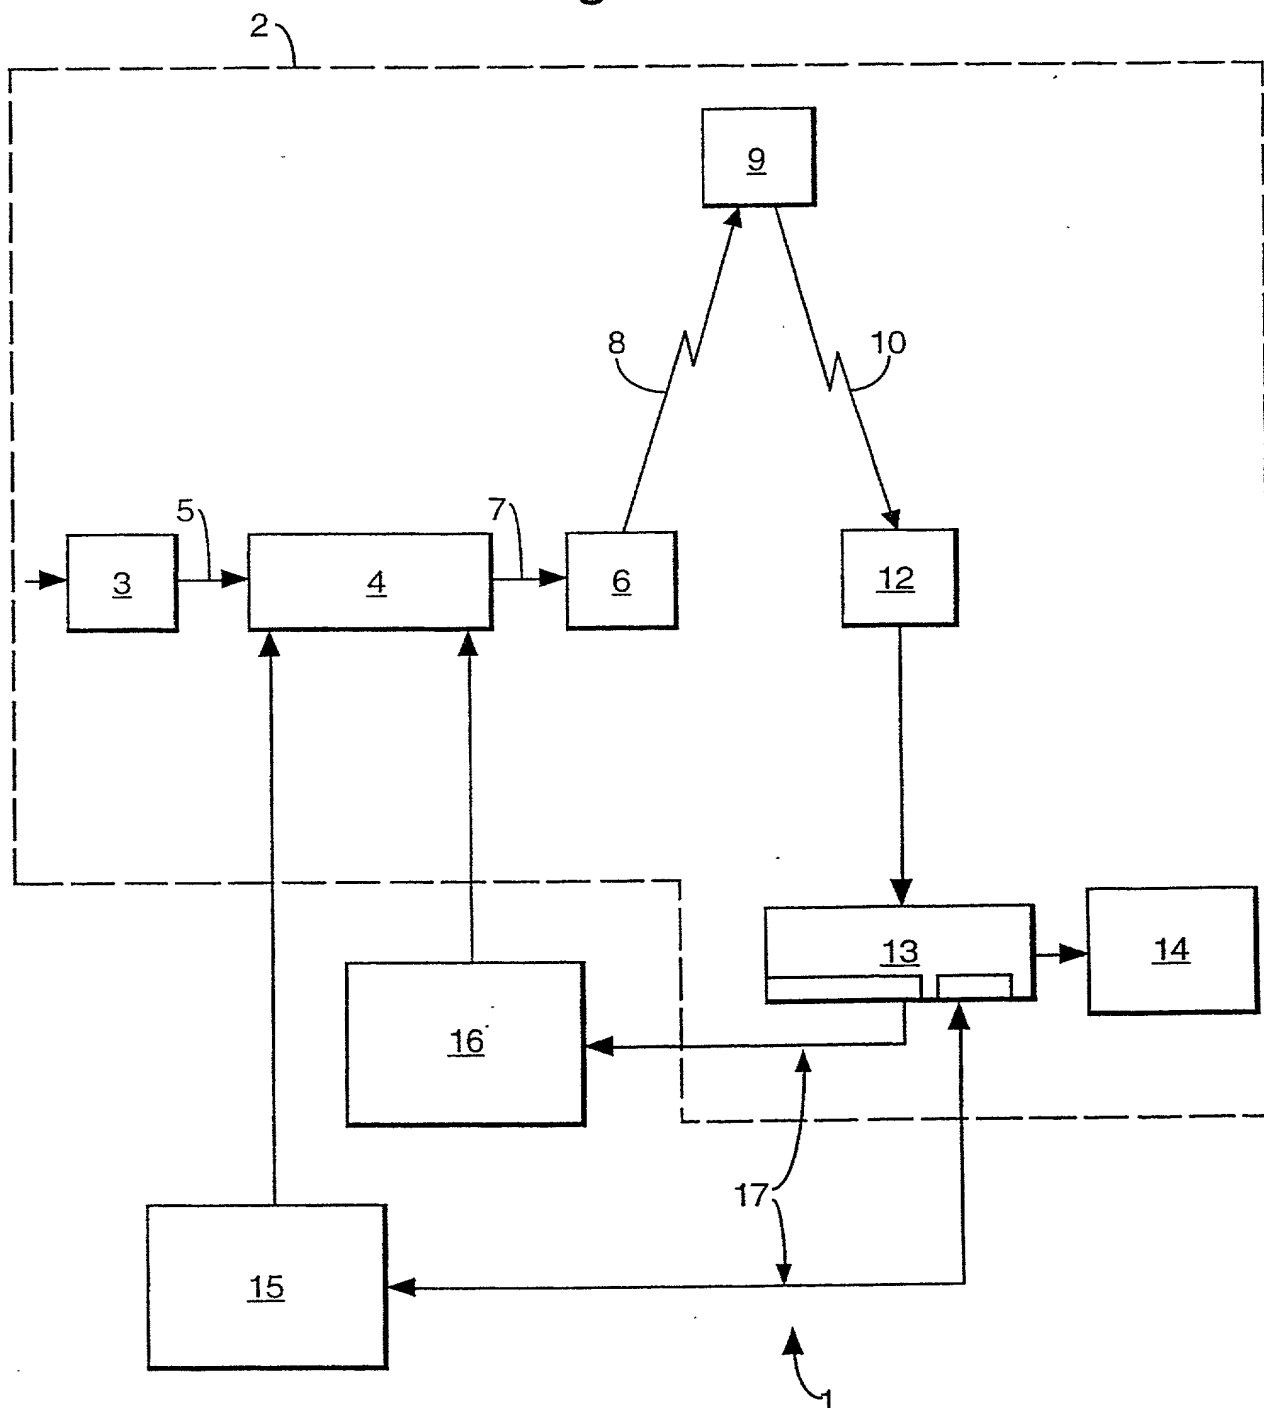

09/622246





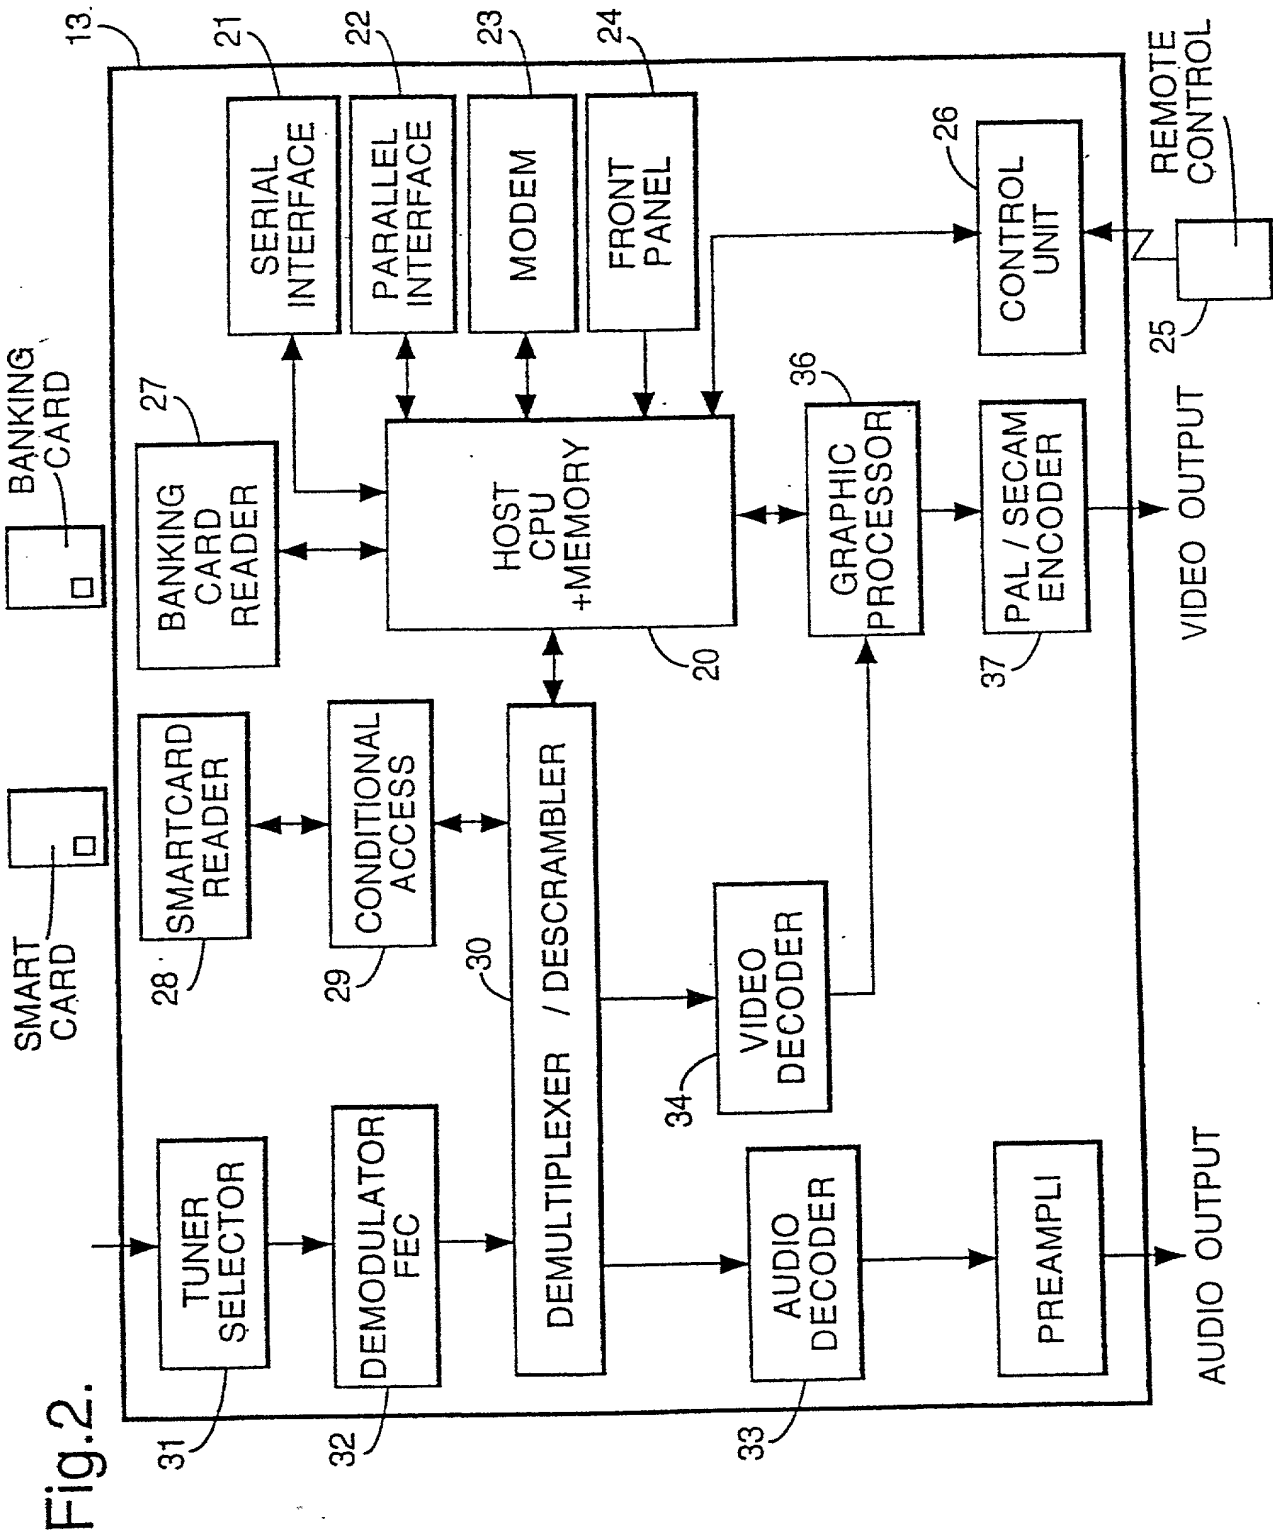


Fig.3.

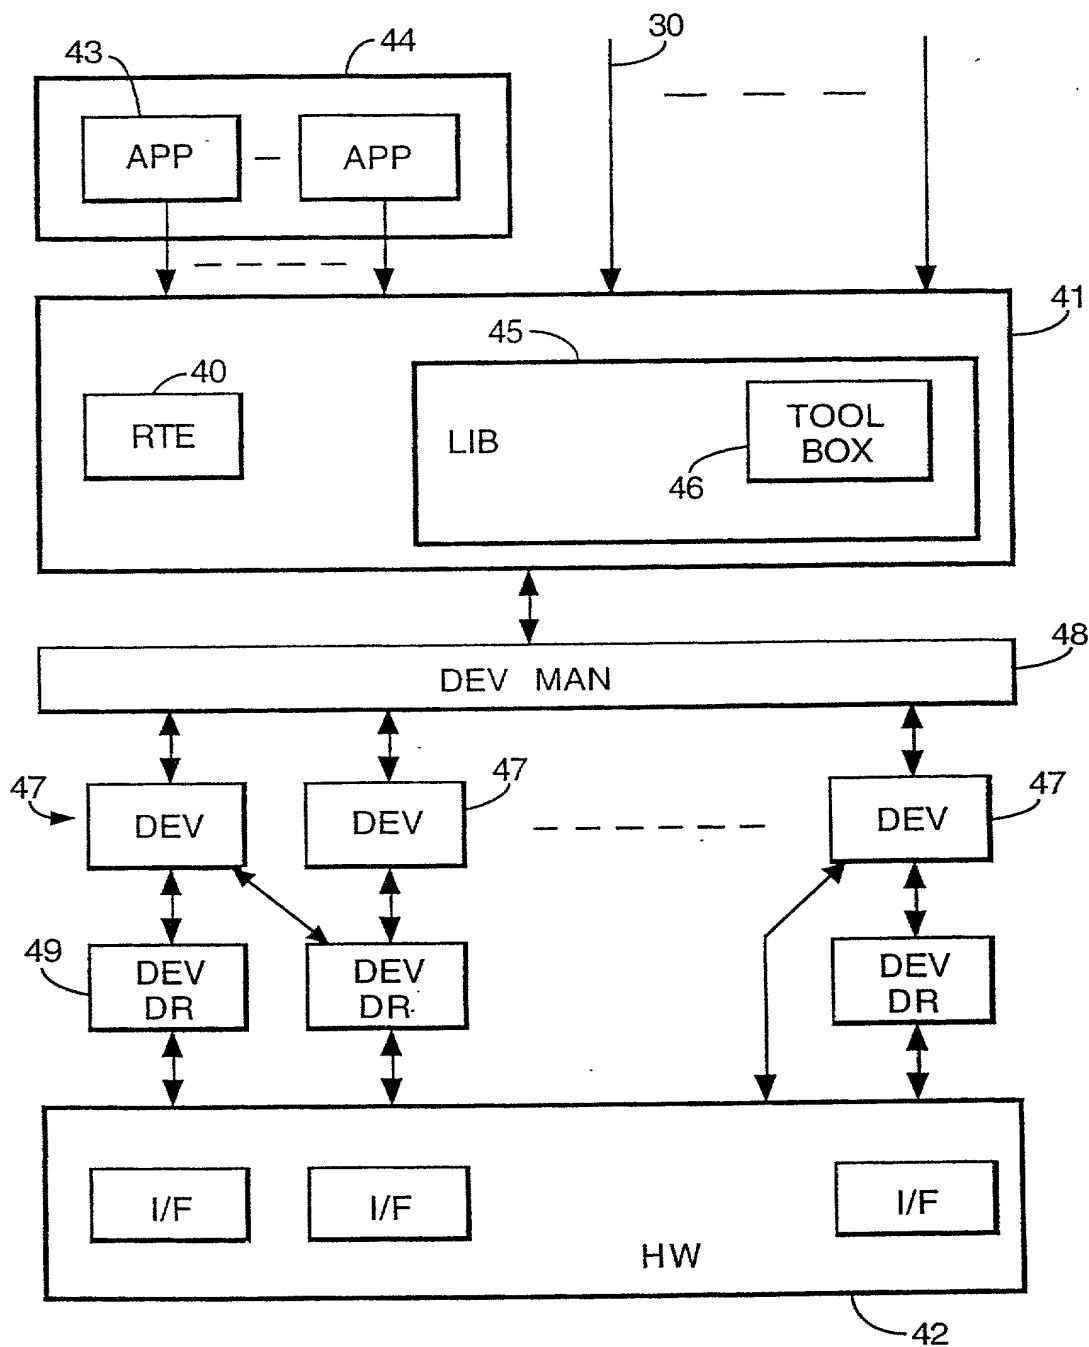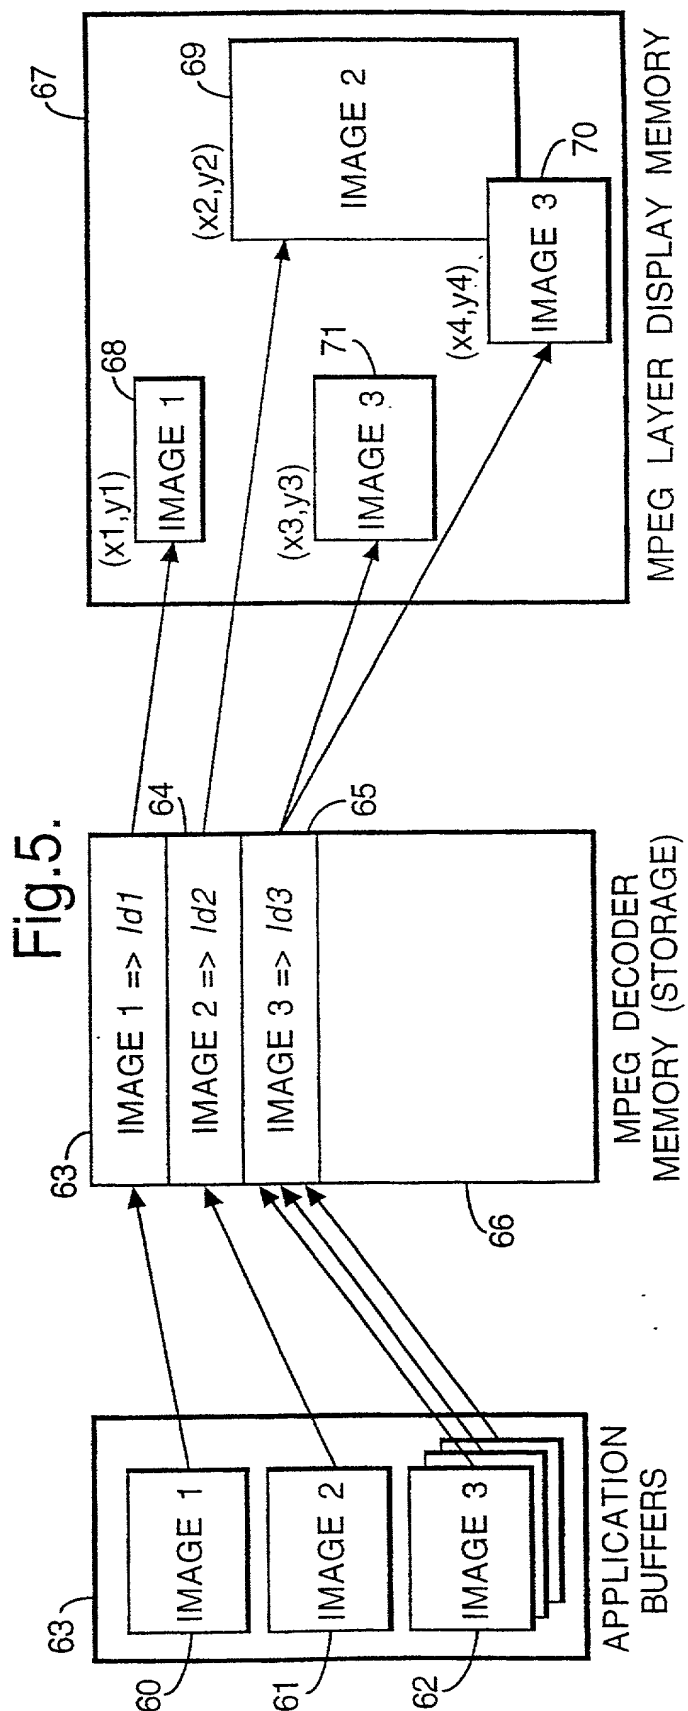

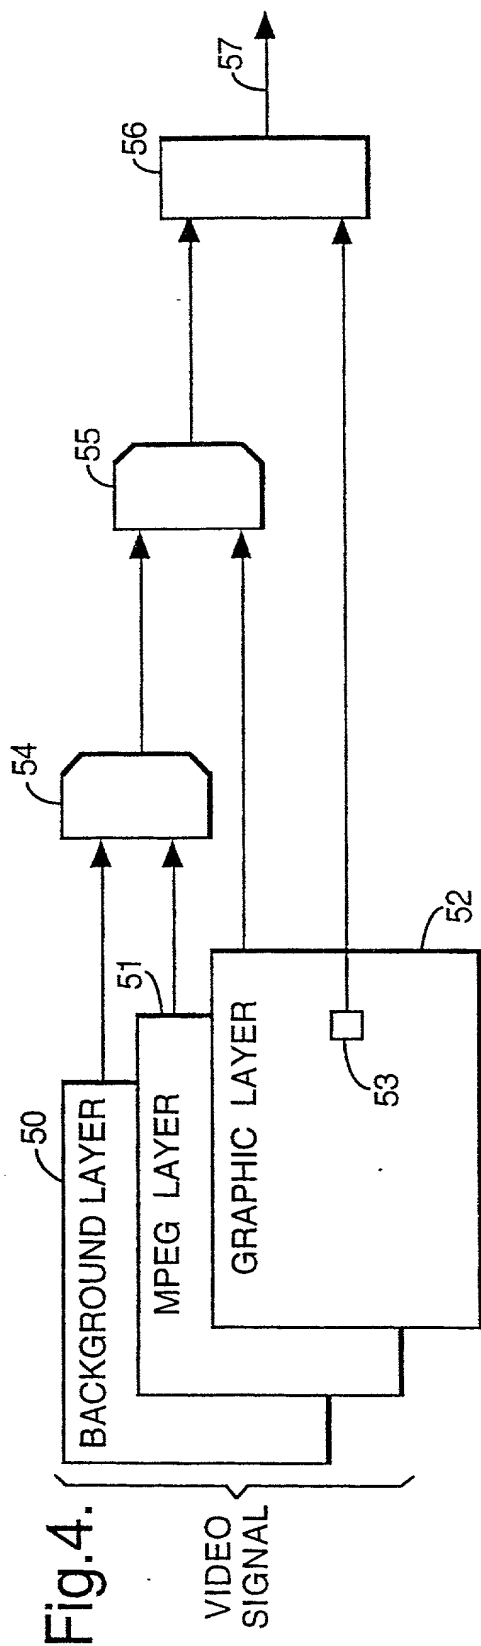

Parameter	Value	Unit	Source
Age	1.0	yr	1.0
Height	1.75	m	1.75
Weight	70	kg	70
Sex	Male		Male
Activity	1.0		1.0
Energy	1.0		1.0
Protein	1.0		1.0
Carbohydrate	1.0		1.0
Fat	1.0		1.0
Alcohol	1.0		1.0
Smoking	1.0		1.0
Drinking	1.0		1.0
Stress	1.0		1.0
Sleep	1.0		1.0
Exercise	1.0		1.0
Medication	1.0		1.0
Diet	1.0		1.0
Genetics	1.0		1.0
Environment	1.0		1.0
Health	1.0		1.0
Wellness	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life	1.0		1.0
Life Expectancy	1.0		1.0
Mortality	1.0		1.0
Morbidity	1.0		1.0
Disability	1.0		1.0
Quality of Life			

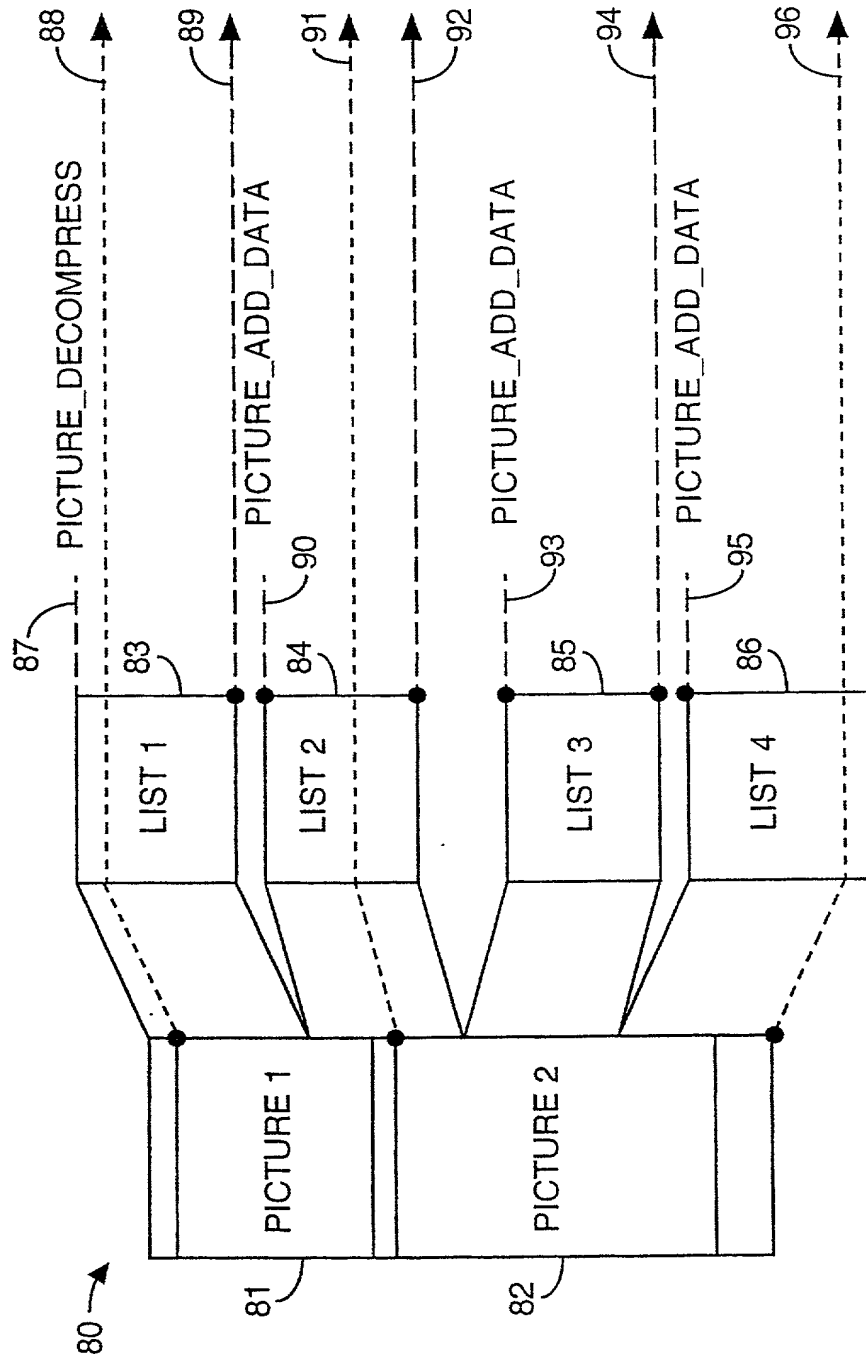

Declaration and Power of Attorney for Patent Application**Déclaration et Pouvoirs pour Demande de Brevet****French Language Declaration****22511**

PATENT TRADEMARK OFFICE

En tant que l'inventeur nommé ci-après, je déclare par le présent acte que:

As a below named inventor, I hereby declare that:

Mon domicile, mon adresse postale et ma nationalité sont ceux figurant ci-dessous à côté de mon nom.

My residence, post office address and citizenship are as stated next to my name.

Je crois être le premier inventeur original et unique (si un seul nom est mentionné ci-dessous), ou l'un des premiers co-inventeurs originaux (si plusieurs noms sont mentionnés ci-dessous) de l'objet revendiqué, pour lequel une demande de brevet a été déposée concernant l'invention intitulée

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

PROCESSING OF DIGITAL PICTURE DATAIN A DECODER

et dont la description est fournie ci-joint à moins que la case suivante n'ait été cochée:

the specification of which is attached hereto unless the following box is checked:

☐ a été déposée le _____
sous le numéro de demande des Etats-Unis ou le
numéro de demande international PCT
_____ et modifiée le
_____ (le cas échéant).

☐ was filed on _____
as United States Application Number or PCT
International Application Number
_____ and was amended on
_____ (if applicable).

Je déclare par le présent acte avoir passé en revue et compris le contenu de la description ci-dessus, revendications comprises, telles que modifiées par toute modification dont il aura été fait référence ci-dessus.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

Je reconnais devoir divulguer toute information pertinente à la brevetabilité, comme défini dans le Titre 37, § 1.56 du Code fédéral des réglementations.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

French Language Declaration

Je revendique par le présent acte avoir la priorité étrangère, en vertu du Titre 35, § 119(a)-(d) ou § 365(b) du Code des Etats-Unis, sur toute demande étrangère de brevet ou certificat d'inventeur ou, en vertu du Titre 35, § 365(a) du même Code, sur toute demande internationale PCT désignant au moins un pays autre que les Etats-Unis et figurant ci-dessous et, en cochant la case, j'ai aussi indiqué ci-dessous toute demande étrangère de brevet, tout certificat d'inventeur ou toute demande internationale PCT ayant une date de dépôt précédant celle de la demande à propos de laquelle une priorité est revendiquée.

Prior foreign application(s)

Demande(s) de brevet antérieure(s)

98400367.3

European

(Number)

(Country)

(Numéro)

(Pays)

(Number)

(Country)

(Numéro)

(Pays)

Je revendique par le présent acte tout bénéfice, en vertu du Titre 35, § 119(e) du Code des Etats-Unis, de toute demande de brevet provisoire effectuée aux Etats-Unis et figurant ci-dessous.

(Application No.)
(N° de demande)(Filing Date)
(Date de dépôt)(Application No.)
(N° de demande)(Filing Date)
(Date de dépôt)

Je revendique par le présent acte tout bénéfice, en vertu du Titre 35, § 120 du Code des Etats-Unis, de toute demande de brevet effectuée aux Etats-Unis, ou en vertu du Titre 35, § 365(c) du même Code, de toute demande internationale PCT désignant les Etats-Unis et figurant ci-dessous et, dans la mesure où l'objet de chacune des revendications de cette demande de brevet n'est pas divulgué dans la demande antérieure américaine ou internationale PCT, en vertu des dispositions du premier paragraphe du Titre 35, § 112 du Code des Etats-Unis, je reconnais devoir divulguer toute information pertinente à la brevetabilité, comme défini dans le Titre 37, § 1.56 du Code fédéral des réglementations, dont j'ai pu disposer entre la date de dépôt de la demande antérieure et la date de dépôt de la demande nationale ou internationale PCT de la présente demande:

PCT/IB99/00288 8 February 1999

(Application No.)
(N° de demande)(Filing Date)
(Date de dépôt)(Application No.)
(N° de demande)(Filing Date)
(Date de dépôt)

Je déclare par le présent acte que toute déclaration ci-incluse est, à ma connaissance, véridique et que toute déclaration formulée à partir de renseignements ou de suppositions est tenue pour véridique; et de plus, que toutes ces déclarations ont été formulées en sachant que toute fausse déclaration volontaire ou son équivalent est passible d'une amende ou d'une incarcération, ou des deux, en vertu de la Section 1001 du Titre 18 du Code des Etats-Unis, et que de telles déclarations volontairement fausses risquent de compromettre la validité de la demande de brevet ou du brevet délivré à partir de celle-ci.

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365 (b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below, and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Claimed

Droit de priorité revendiqué

16 February 1998

☒(Day/Month/Year Filed)
(Jour/Mois/Année de dépôt)☐(Day/Month/Year Filed)
(Jour/Mois/Année de dépôt)

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

Pending

(Status) (patented, pending, abandoned)
(Statut) (breveté, en cours d'examen, abandonné)(Status) (patented, pending, abandoned)
(Statut) (breveté, en cours d'examen, abandonné)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

French Language Declaration

POUVOIRS: En tant que l'inventeur cité, je désigne par la présente l'(les) avocat(s) et/ou agent(s) suivant(s) pour qu'ils poursuive(nt) la procédure de cette demande de brevet et traite(nt) toute affaire s'y rapportant avec l'Office des brevets et des marques: (mentionner le nom et le numéro d'enregistrement).

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)

Jonathan P. Osha, Reg. No. 33,986	Adenike A. Adewuya, Reg. No. 42,254
Alan D. Rosenthal, Reg. No. 27,833	Y. Renee Alsandor, Reg. No. 45,883
Richard A. Fagin, Reg. No. 39,182	Jeffrey S. Bergman, Reg. No. 45,925
K. KaRan Reed, Reg. No. 45,036	Scott W. Hejny, Reg. No. 45,882
David E. Mixon, Reg. No. 43,809	Thomas K. Scherer, Reg. No. 45,079

Adresser toute correspondance à:

Send Correspondence to: Jonathan P. Osha
ROSENTHAL & OSHA L.L.P.
700 Louisiana, Suite 4550
Houston, Texas 77002

Adresser tout appel téléphonique à:
 (nom et numéro de téléphone)

Direct Telephone Calls to:
 (name and telephone number)

Jonathan P. Osha (713) 228-8600

Nom complet de l'unique ou premier inventeur <u>1-10</u>	Full name of sole or first inventor <u>Dominique HAMERY</u>
Signature de l'inventeur _____ Date _____	Inventor's signature <u>[Signature]</u> Date <u>18/07/00</u>
Domicile _____	Residence <u>27 bd Edmond Rostand, F 92500 Rueil Malmaison, FRANCE</u>
Nationalité _____	Citizenship <u>FRANCE</u>
Adresse postale _____	Post Office Address <u>27 bd Edmond Rostand, F 92500 Rueil Malmaison, FRANCE</u>
Nom complet du second co-inventeur, le cas échéant _____	Full name of second joint inventor, if any _____
Signature du second inventeur _____ Date _____	Second Inventor's signature _____ Date _____
Domicile _____	Residence _____
Nationalité _____	Citizenship _____
Adresse postale _____	Post Office Address _____

(Fournir les mêmes renseignements et la signature de tout co-inventeur supplémentaire.)

(Supply similar information and signature for third and subsequent joint inventors.)